



R3-R8D Smart Deadbolt  
**Standalone Functions**  
**EZ Mode & Normal Mode**



## EZ Mode

### Change the Master Code (4-6 digits)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **0** + # + **new master code** + # + **new master code** again + # + \* # #

### Add a SOLE User Code (4-6 digits)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **1** + # + add a **User Code** + # + \* # #

△ Only ONE user code can be saved under EZ mode. Using KevLok APP, another 10 user codes can be saved.

## Delete User Code

(Excluding Master Code)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **3** + # + **two random numbers light up in touch screen** + # + \* # #

## Turn on/off the Bluetooth

(For connection with KevLok APP)

1. Press and hold the RESET button until the key screen lights up.
2. Turn **on** the Bluetooth  
Enter **Master Code** + # + **6** + # + **0** + # + \* # #
3. Turn **off** the Bluetooth  
Enter **Master Code** + # + **6** + # + **1** + # + \* # #

△ Turn off the Bluetooth can extend battery life when the lock is not in use for a period of time.

## Normal Mode

### Change Master Code (4-6 digits)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **00** + # + **new master code** + # + **new master code** again + # + \* # #

### Add User Codes (4-6 digits)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **01** + # + **UID code** (any sequence number between 1 to 999) + # + add a **User Code** + # # + \* # #

△ Maximum capacity: 200 user codes under Normal mode. Another 10 user codes can be set via KevLok APP.

## Delete User Codes

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **02** + # + **UID code** (1-999) + # + \* # #

## Change User Code

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **04** + # + **UID code** (001-999) + # + **new User Code** + # + \* # #

## Add a One-Time Passage Code

(4-6 digits)

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **05** + # + **One-Time user code** + # + \* # #

- ⚠ only ONE one-time user code can be saved. An additional 10 one-time user codes can be set via KevLok APP.

### Delete One-Time Passage Code

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **06** + # + \* # #

- ⚠ One-time user codes added from KevLok APP cannot be deleted under normal mode.

### Turn off Silent Mode

1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **11** + # + \* # #

## Turn on Silent Mode


1. Press and hold the RESET button until the touch screen lights up.
2. Enter **Master Code** + # + **12** + # + \* # #

△ Silent mode only mutes the sound when entering user codes. You will still hear a beep sound during unlocking, manual locking, and low battery alert.

## Turn on/off the Bluetooth

(For connection with KevLok APP)

1. Press and hold the RESET button until the touch screen lights up.
2. Turn **on** Bluetooth  
Enter **Master Code** + # + **13** + # + **0** + # + \* # #
3. Turn **off** Bluetooth  
Enter **Master Code** + # + **13** + # + **1** + # + \* # #

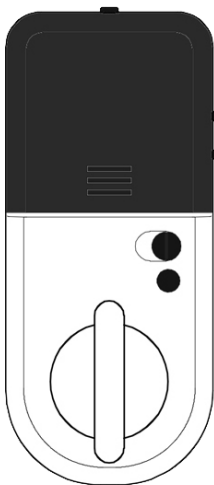

R3-R8D Smart Deadbolt  
**Standalone Functions**  
**EZ Mode & Normal Mode**

