

SAFETY



ELECTRIC STRIKE

DUAL MODE


DEL300SLD



DEL125SD




DEL125SD DIMENSION

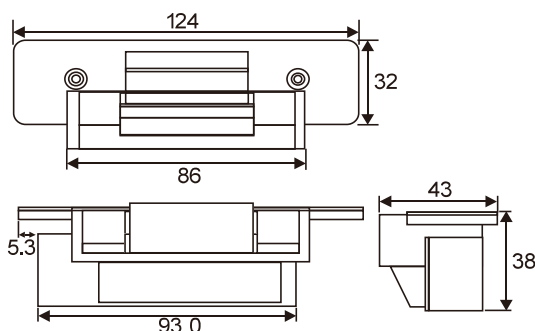

General Feature

- ★ DIMENSIONS:
DEL125SD: 124Lx43.5Wx32.5Dmm
DEL300SLD: 124Lx47Wx32Dmm
- ★ Latch Deeper:
DEL300SLD: 5/8" (15.8mm)
DEL125SD: 1/2" (12.7mm)
- ★ Modes:
DEL125SD: Fail Secure / Fail Safe
DEL300SLD: Fail Secure / Fail Safe
- Current:
★ DEL125SD: 280mA/12VDC, 140mA/240VDC
DEL300SLD: 280mA/12VDC, 140mA/24VDC
- Face Plates:
★ DEL125SD-Stainless Steel
DEL300SLD-stainless Steel
- Sensor Options:
SD - Door Sensor
SLD - Lock sensor & Door sensor

DEL300SLD DIMENSION

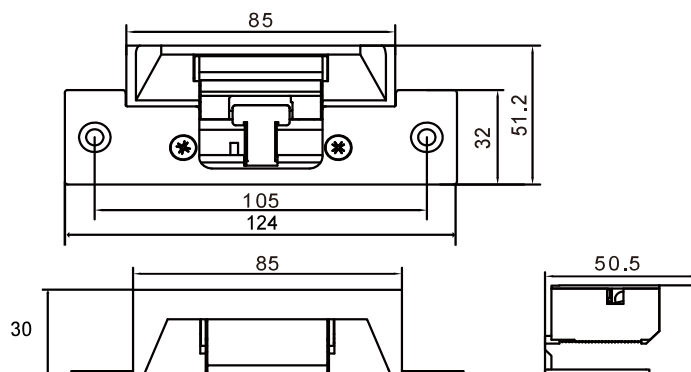

DUAL MODE


DEL124SLD



DEL124SLD-EX




DEL124SLD DIMENSION

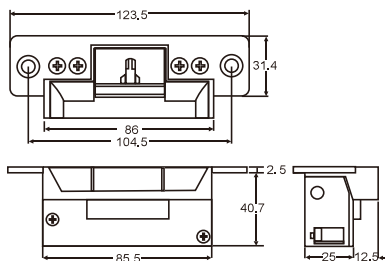

General Feature

- ★ **DIMENSIONS:**
DEL124SLD: 123.5Lx31.4Wx40.7Dmm
Keeper Depth: 12.7mm
DEL124SLD-EX: 165Lx31Wx40.2Dmm
Keeper Depth: 12.7mm
- ★ **FACE PLATE DIMENSIONS:**
DEL124SLD: 123.5Lx31.4Wx2.5Dmm
DEL124SLD-EX: 165Lx31Wx2Tmm
- ★ **Modes:**
DEL124SLD Aluminum face plate fail secure w/door, lock monitor 12VDC
DEL124SLD-EX Stainless steel face plate fail secure w/door, lock monitor 12VDC
- ★ **Current:** 260mA/12VDC or 150mA/24VDC (specify on order)
- ★ **Fail Safe/Fail Secure:** Site convertible from one mode to the other (Fail secure default, unless specify on order)

DEL124SLD-EX DIMENSION

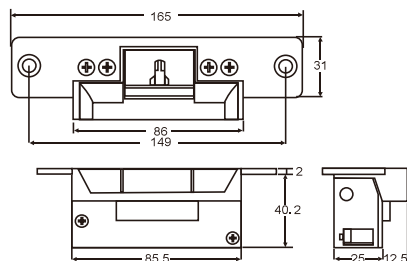


DUAL MODE

DEL304SLD




DEL304SLD DIMENSION

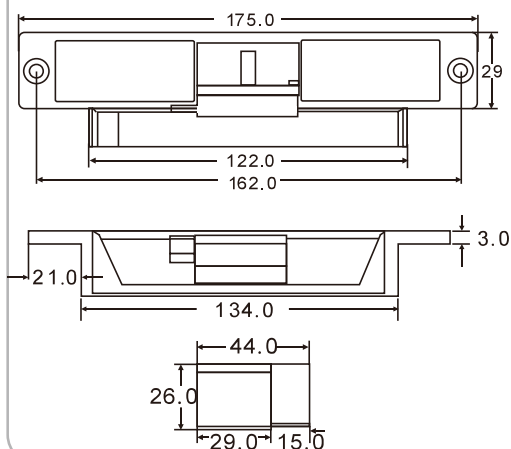

General Feature

- ★ **DIMENSIONS:**
DEL304SLD: 175Lx29Wx26Dmm
Keeper Depth: 10.8mm
Face Plate: 175Lx29Wx3Tmm
- ★ **Mode:** Stainless steel face plate fail secure w/door, lock sensor
- ★ **Current:**
280mA/12VDC or 140mA/24VDC (specify on order)
170mA/12VAC or 85mA/24VAC (specify on order)
- ★ **Door Latch:** 10.8mm
- ★ **Site convertible from one mode to the other (Fail secure default, unless specify on order)**

INSTALLATION

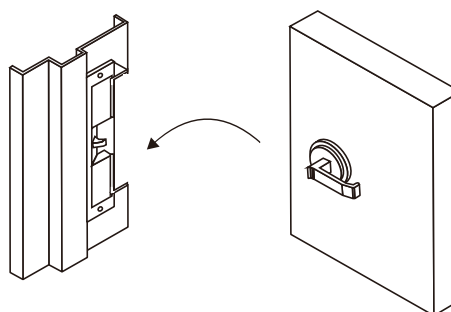


DUAL MODE -For Rim Exit Device

DEL3310




DEL3310 DIMENSION

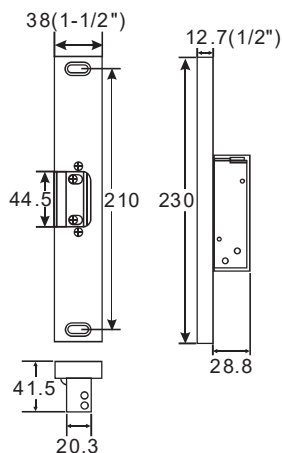

General Feature

- ★ DIMENSIONS:
DEL3310: 230mmLx38mmWx41.5mmD
Voltage: 12V or 24VDC/AC
Mode: Aluminum face Plate fail secure.
- ★ Current:
400mA/12VDC or 200mA/24VDC (specify on order)
540mA/12VAC or 308mA/24VAC (specify on order)
- ★ Door Latch: 15 mm
- ★ Site convertible from one mode to the other (Fail secure default, unless specify on order)

INSTALLATION

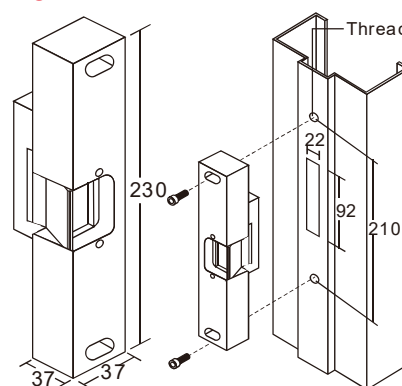


UNIT:mm

DEL3350SLD



DEL3350SLD DIMENSION

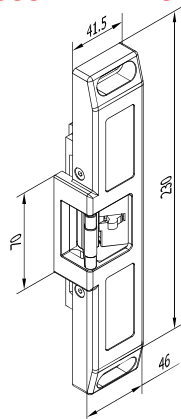


UNIT:mm

General Feature

- ★ DIMENSIONS:
DEL3350SLD: 230mmLx46mmWx30.5mmD
Voltage: 12V or 24VDC
Mode: Failsafe/ Failsecure with door & lock sensor
- ★ Current:
280mA/12VDC 140mA/24VDC
- ★ Material: Stainless Steel
- ★ Door Latch: 17 mm
- ★ Keeper sensor(optional)
- ★ Site convertible from one mode to the other (Fail secure default, unless specify on order)

INSTALLATION


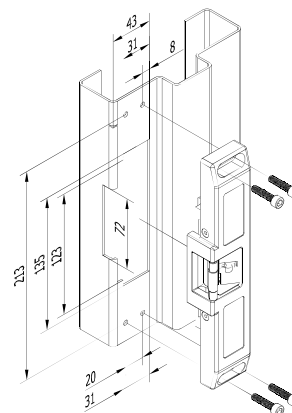


UNIT:mm


DEL1125



DEL1125 INSTALLATION



Dimensions needed to install strike
Unit:mm

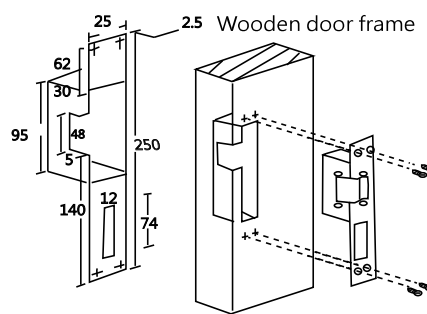

General Feature

- ★ Dimensions: 250L x 25W x 31D mm
- ★ DEL1125/DEL1125F Fail Secure/Fail Safe
- ★ Current: 600mA/12VDC, (F)280mA/12VDC
300mA/24VDC, (F)140mA/24VDC
- ★ Face Plates:
- ★ DEL1125(F) - Steel (Painted)
- ★ SDEL1125(F) - Stainless steel

Keep Depth: 6mm

Metal or Aluminium door frame



2.5 Wooden door frame

DEL1125-(J.A.B)



J: Adjustable Jaw
A: Day Locking Lever
B: Impulse Switch

DEL1125 INSTALLATION

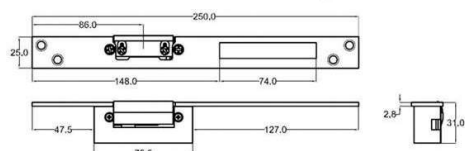

General Feature



- ★ DEL1125J - Steel face plate adjustable symmetrical strike fail secure 12VDC
- ★ DEL1125JA - Stainless steel face plate adjustable symmetrical strike, day locking lever, fail secure 12VDC
- ★ DEL1125JAB-24 - Steel face plate adjustable symmetrical strike, day locking lever, impulse switch, fail secure 24VDC
- ★ Fail safe type: DEL1125F/SDEL1125JF only
- ★ Dimensions: 250L x 25W x 31Hmm
- ★ Voltage: 12VDC(default) or 24VDC
- ★ Current draw:
 - fail secure - 600mA/12VDC
 - fail secure - 300mA/24VDC(specified on order)
 - fail safe - 280mA/12VDC
 - fail safe - 140mA/24VDC(specified on order)
- ★ Face plate:
 - steel/stainless steel - 250L x 25W x 2.8T mm
- ★ Built-in voltage spike suppressor
- ★ Keeper depth: 6mm
- ★ Applicable door latch: 9mm
- ★ CE approved

DEL1316




DEL1316 INSTALLATION

Metal or Aluminium door frame



Dimensions needed to install strike
Unit:mm

Wooden door frame




General Feature

- ★ Dimensions: 160L x 25W x 31D mm
- ★ DEL1316/DEL1316F Fail Secure/Fail Safe
- ★ Current: 400mA/12VDC, (F)200mA/12VDC
200mA/24VDC, (F)100mA/24VDC
- ★ Face Plates:
DEL1316(F) - Steel (Painted)
SDEL1316(F) - Stainless steel
- ★ Keep Depth: 9.6mm

DEL1316(J.A.B)



INSTALLATION

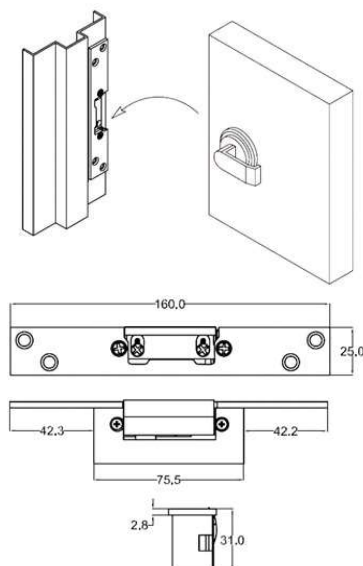

General Feature

- ★ DEL1316J – Steel face plate, Adjustable symmetrical strike, fail secure, 12VDC
- ★ DEL1316JA – Stainless steel face plate, Adjustable symmetrical strike, w/day locking lever, fail secure, 12VDC
- ★ DEL1316JAB-24 – Steel face plate, Adjustable symmetrical strike, w/day locking lever and impulse switch, fail secure, 24VDC
- ★ Fail safe type: DEL1316JF/SDEL1316JF only.
- ★ Dimensions:
DEL1316J/SDEL1316J - 160L x 25W x 31.4H mm
- ★ Voltage: 12VDC(default) or 24VDC
- ★ Current draw:
600mA/12VDC, 300mA/24VDC (fail secure)
280mA/12VDC, 140mA/24VDC (fail safe)
- ★ Face plate:
aluminum - 160L x 25W x 2.8T mm
stainless steel - 160L x 25W x 2.8T mm
- ★ Keeper depth: 6mm
- ★ Applicable door latch: 9 mm




DEL1335



General Feature

- ★ Dimensions: 125L x 32W x 38D mm
165L x 32W x 38D mm (SDEL1335)
- ★ DEL1335/DEL1335F Fail Secure/Fail Safe
- ★ Current: 400mA/12VDC, (F)200mA/12VDC
200mA/24VDC, (F)100mA/24VDC
- ★ Face Plates:
DEL1335(F) - Aluminium
SDEL1335 - Stainless steel (165mmL)
- ★ Keep Depth: 16mm

DEL1335 INSTALLATION

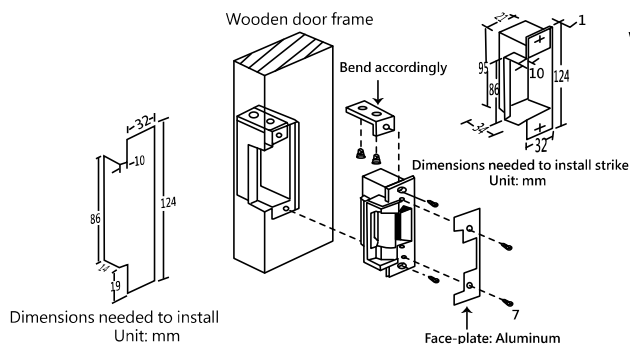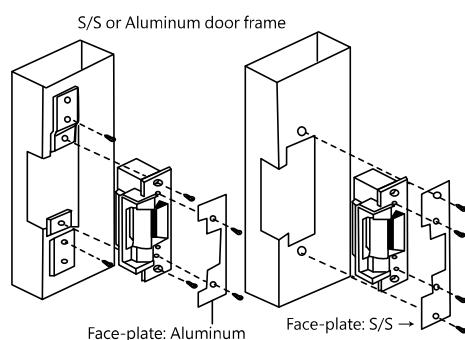


FRAMELESS SERIES

DEL245SL(D)



DEL245SLD DIMENSION

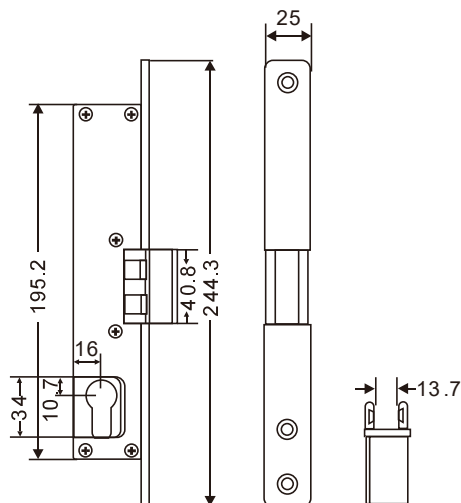

General Feature

- ★ DIMENSIONS:
DEL245SL: 245L x 25W x 41D mm
- ★ Mode:
DEL245SL Double-swing glass door (dual mode) fail secure w/lock sensor
DEL245SLD Double-swing glass door (dual mode) w/lock & door sensor
- ★ Glass thickness: 8~12mm
- ★ Current: 300mA/12VDC / 150mA/24VDC
- ★ Fail Safe/Fail Secure:
Site convertible from one mode to the other (Fail secure default, unless specify on order)
- ★ Option:
Lock Cylinder for Emergency opening in Fail Secure Mode
- ★ Application:
1. Application to frameless glass door only
2. Bi-directional locking function

INSTALLATION

