




DUAL MODE -For Rim Exit Device

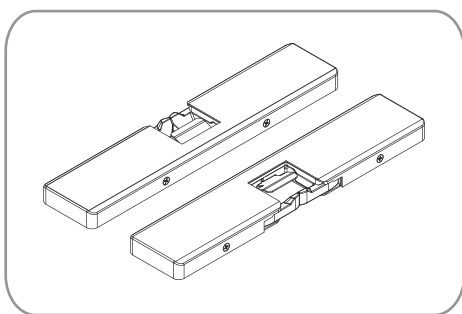

DEL3320SD INSTALLATION

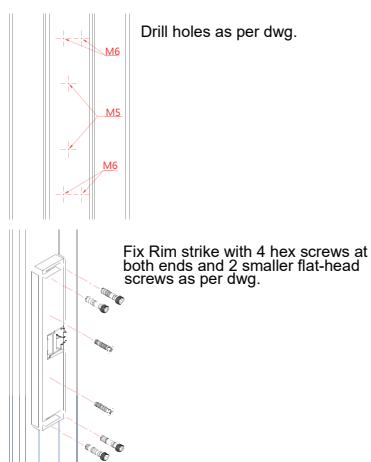


Install the cover plate and fasten four fixed screws.



General Feature

- ★ DIMENSIONS:
DEL3320SD: 233.2mmLx48.1mmWx13.8mmD
Voltage: 12V or 24VDC
Mode: Failsafe/ Failsecure with door sensor
- ★ Current:
280mA/12VDC 140mA/24VDC
- ★ Material: Stainless Steel
- ★ Door Latch: 12.7 mm
- ★ Site convertible from one mode to the other
(Fail secure default, unless specify on order)

DEL3320SD DIMENSION

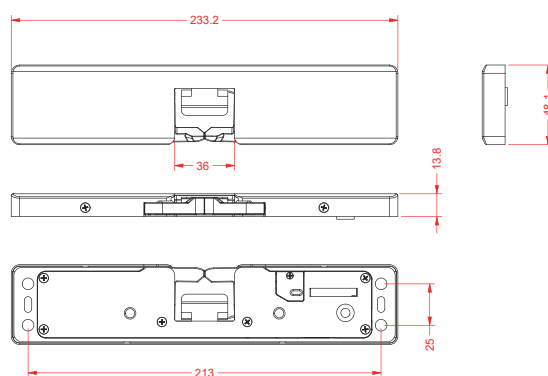


DEL1125




General Feature

- ★ Dimensions: 250L x 25W x 31D mm
- ★ DEL1125/DEL1125F Fail Secure/Fail Safe
- ★ Current: 600mA/12VDC, (F)280mA/12VDC
300mA/24VDC, (F)140mA/24VDC
- ★ Face Plates: DEL1125(F) - Steel (Painted)
- ★ Keep Depth: 6mm

DEL1125 INSTALLATION



Metal or Aluminium door frame



Dimensions needed to install strike
Unit:mm

