



BSI CYLINDRICAL LOCKSET

Cylindrical locks are widely used in both commercial and residential applications. BSI Cylindrical locks are graded for various applications by ANSI Grade.

5100 SERIES GRADE 1 LEVERSET



GRADE 1





Underwriters Laboratories Inc.®



General Feature

1. 5100 Standard - Certificated by ANSI A156.2-2003.
2. UL listed - Meet UL 3 hours fire rating.
3. 6-Pin cores with the capacity to retrofit all 6-Pin best style locksets.
4. Wide variety of compatible locksets for other famous brands like Schlage, Arrow, Best, Falcon & KSP.
5. Standard Specifications:
 - (1) Lever: zinc, 4 29/32" (125mm) From Lock center to Lever end
 - (2) Rose: Φ 3 17/32" (90mm).
 - (3) Door thickness: 1"-3/8" ~ 2" (35~51mm)
 - (4) Backset: 2 23/64" or 2 3/4" (60mm or 70mm)
 - (5) Concealed Screws: The screws are hidden (concealed), not exposed at exterior side.
6. Clutch Function: The exterior lever have releasing to prevent heavy impact while pressing the lever at locking position.
7. Roller Retractor: The Retractor equipped with roller to enhance the mechanical reliability & durability.
8. Finishes: US26D, US32D


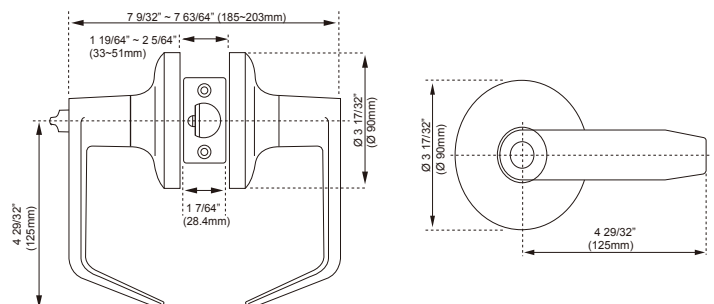


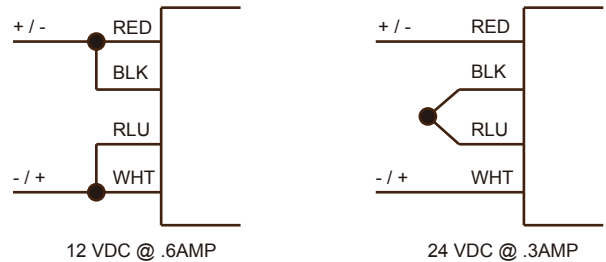5100 GRADE 1 ELECTRIC LEVERSET**GRADE 1**Underwriters
Laboratories Inc.®**5100-S ELECTRIC LOCKSET WITH SOLENOID****STANDARD WIRING**
Dual Coil Solenoid**5100-M ELECTRIC LOCKSET WITH MOTOR****MOTOR SPEC. SHEET**

No Load		Rated Load		Starting Torque (g-cm)	End Play	Output Shaft	Shaft Direction	Ansi-Static
Speed (r.p.m)	Current (mA)	Speed (r.p.m)	Current (mA)					
16400	<40	12000	<175	>10.5	0.05~0.30	4.0±0.2	CCW	250V 10MΩ

5200 SERIES GRADE 2 LEVERSET**GRADE 2**Underwriters
Laboratories Inc.®**General Feature**

- 5200 Standard - Certificated by ANSI A156.2-2003.
- 6-Pin cores with the capacity to retrofit all 6-Pin best style locksets.
- Wide variety of compatible locksets for other famous brands like Schlage, Arrow, Best, Falcon & KSP.
- Standard Specifications:
 - (1) Lever: Zinc, 4 9/16" (116mm) From Lock center to Lever end
 - (2) Rose: Φ 3 11/32" (85mm).
 - (3) Door thickness: 1"-3/8 ~ 2" (35~51mm)
 - (4) Backset: 2 23/64" or 2 3/4" (60mm or 70mm)
 - (5) Concealed Screws: The screws are hidden (concealed), not exposed at exterior side.
 - (6) Clutch function: for outside Lever to prevent damage.
- Inside knob lever is always free to exit.
- The tolerance of each part is very precise, the wavering condition is hardly seen.
- Easy install
- Finishes: US26D, US32D






FUNCTION:

BSI MODEL	ANSI		BSI MODEL	ANSI	
5100FL 5200FL	F109	ENTRANCE/OFFICE LOCK Dead locking latch bolt operated by lever from either side except when outside lever is locked by the push or turn button inside. Key outside or operating inside lever releases push or turn button unlocking outside lever except when push or turn button has been rotated to keep outside lever locked. Inside push or turn button must be manually operated to unlock outside lever. Inside lever always operates latch bolt.	5101FL 5201FL	F82	ENTRANCE Dead locking latch bolt operated by lever from either side except when outside lever is locked by push button or other locking device on inside. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button or other locking device and retracts latch bolt. Closing door does not release push button or other locking device.
5102FL 5202FL	F90	CORRIDOR LOCK Dead locking latch bolt operated by lever from either side except when outside lever is locked by key in outside lever or by push button or other locking device on inside. Key in outside lever locks or unlocks outside lever. Operating inside lever releases push button or other locking device placed position. Closing door releases push button or other inside locking device. Inside lever always operates latch bolt.	5111FL 5211FL	F91	DOUBLE CYLINDER LOCK Dead locking latch bolt operated by lever from either side except when both levers are locked by turning key from either side. Latch bolt is automatically dead locked when door is closed.
5112FL 5212FL	F84	CLASSROOM LOCK Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. Inside lever always operative.	5114FL 5214FL	F80	COMMUNICATING LOCK Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.
5115FL 5215FL	F110	INTRUDER CLASSROOM LOCK Dead locking latch bolt operated by lever from either side. Key either inside or outside locks or unlocks outside lever. Inside lever always operates latch bolt.	5130FL 5230FL	F76	PRIVACY LOCK Latch bolt operated by lever from either side. Outside lever is locked by push button or other locking device inside and unlocked by emergency release outside, operating inside lever or closing door.
5151FL 5251FL	F113	COMMUNICATING (KEY TYPE) LOCK Locks or unlocks by key from inside only. Outside is a blank plate only.	5152FL 5252FL	F111	COMMUNICATING (NON-KEY TYPE) LOCK Latch bolt operated by lever from inside only. Outside is a blank plate only.
5161FL 5261FL	F87	DOUBLE STOREROOM LOCK (NON - CLUTCH) Dead locking latch bolt operated by key in levers, from either side. Both levers always inoperable.	5162FL 5262FL	F86	STOREROOM LOCK Dead locking latch bolt operated by key in outside lever, or by operating inside lever. Outside lever is always inoperable.
5178FL 5278FL		SINGLE DUMMY TRIM Dummy trim for one side of door. Used for door pull or as matching inactive trim. Lever and rose attached by two wood screws.	5279FL		SINGLE DUMMY TRIM Dummy trim for one side of door. Used for door pull or as matching inactive trim. Lever and rose attached by two thru bolt from the other side.




FUNCTION:

BSI MODEL	ANSI		BSI MODEL	ANSI	
5182FL 5282FL	F75	PASSAGE Latch retracted by knobs/levers at all times	5190FL	F77	PATIO LOCK Dead locking latch bolt operated by lever from either side. Outside lever is locked by push button or other locking device inside and unlocked by operating inside lever or closing door.
					

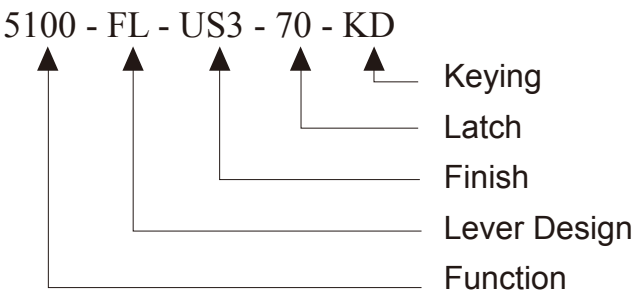

Trim Type	FL - Flat Lever CL - Curve Lever KB - Knob
Latch	60 or 70mm Backset
Keying	KA, KD, CK, MCK MK, GMK, GGMK

EXPLODED VIEW:

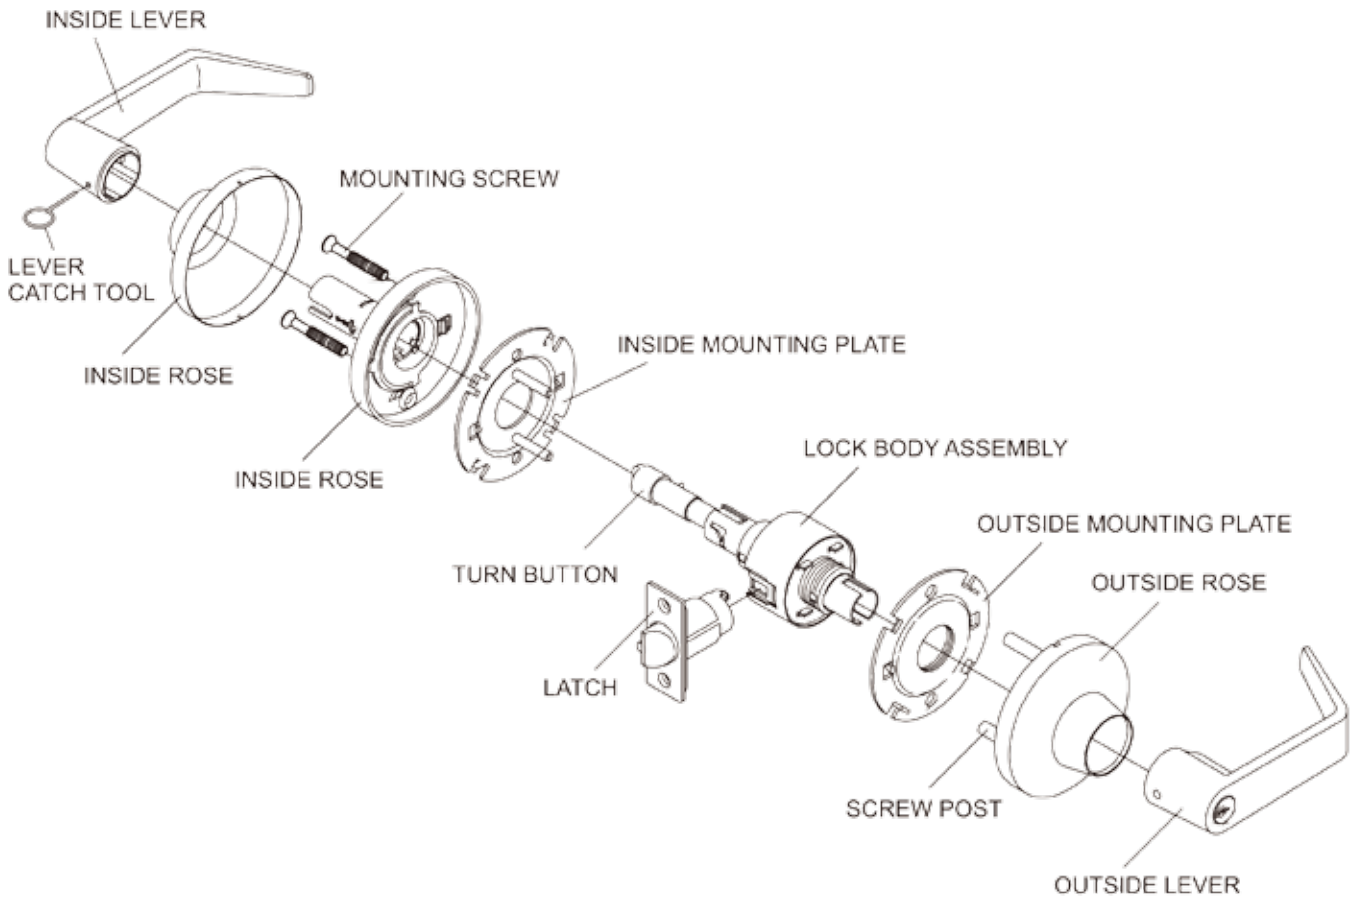



Commercial Grade 2 Auxiliary Locksets



5200 series-DB

5201DB Single cylinder
5202DB Double cylinder
5212DB Classroom



5200IC series-DB

5201ICDB Single cylinder
5202ICDB Double cylinder
5212ICDB Classroom




Specification

Door Thickness	1-3/8" to 1-3/4"(35~45mm) Standard, 5200IC series (40~51mm)
Door Prep	Backset- 2-3/8" or 2-3/4" (60 or 70mm)
Cylinder	Brass, 6 pin
Keyway	Schlage C keyway on standard cylinders. Best A keyway on I/C core cylinders.
Deadbolt	1" throw dead bolt with hardened steel saw-resistant roller in deadbolt
Front	1-1/8" x 2-1/4" square or round corner faceplate. Optional 1" x 2-1/4" square or round corner latch front available.
Strike	1-1/8" x 2-3/4" square corner strike plate & strike frame reinforcer.
Finish	US26D 、US32D 、US3 、US10B 、US32

Compliance

ANSI	Meets ANSI/BHMA A156.36 Grade 2
UL	3 hours fire rating

Functions

Code	Function	Description	ANSI No.
1		Single Cylinder Deadlock with Thumb Turn Deadbolt thrown or retracted by key or by Thumb Turn Bolt automatically deadlocks when fully thrown	E0152
2		Double Cylinder Deadlock Deadbolt thrown or retracted by key from either side Bolt automatically deadlocks when fully thrown	E0142
12		Single Cylinder Deadlock with Thumb Turn Deadbolt thrown or retracted by key Thumb Turn retracts deadbolt but not project it. Bolt automatically deadlocks when fully thrown	E0172

BSI AGENT



BSI Security Co., Ltd.

E-MAIL: sales@bsi-hardware.com

WEBSITE: www.bsi-hardware.com