



Model No.: 1303 Door Closer , ANSI A156.4, GRADE 1

Specifications:




- A. Length of Closer Body 11"
- B. Horizontal Mounting Holes 5"
- C. Vertical Mounting Holes 1"
- D. Width of Closer Body 2 3/4"
- E. Projection from Door 2"

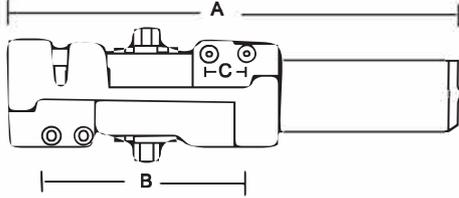


Closing power of 1303 Series closers may be adjusted 50%. Shows recommended range of door width for closer size.

EXTERIOR (and vestibule) door width




Minimum Door width

INTERIOR door width




Minimum Door width


Adjustable size 1 thru 6

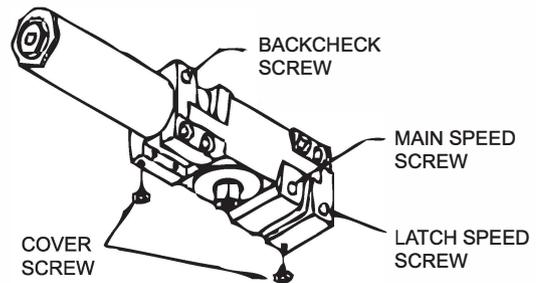


**STANDARD MOUNT
(PULL SIDE)**




**TOP JAMB MOUNT
(PUSH SIDE)**



**PARALLEL MOUNT
(PUSH SIDE)**





Spring power Adjustment

Features:

- Universal application. Non-handed for standard, top-jamb or parallel arm installation
- Non-sized, 1 thru 6. FACTORY PRESET SIZE 3 meets ADA
- Standard adjustable back check function(BA)
- Adjustable closing and latching speed by two separate regulating valves
- Optional adjustable delayed action (DA)
- Preset at the factory for approximately 20 seconds, between 70° and 0°. Delay time easily adjusted up to 1 minute. 1303 DA
- Standard full plastic cover
- Self tapping screws and closer gauge for easy adjustment is standard feature